
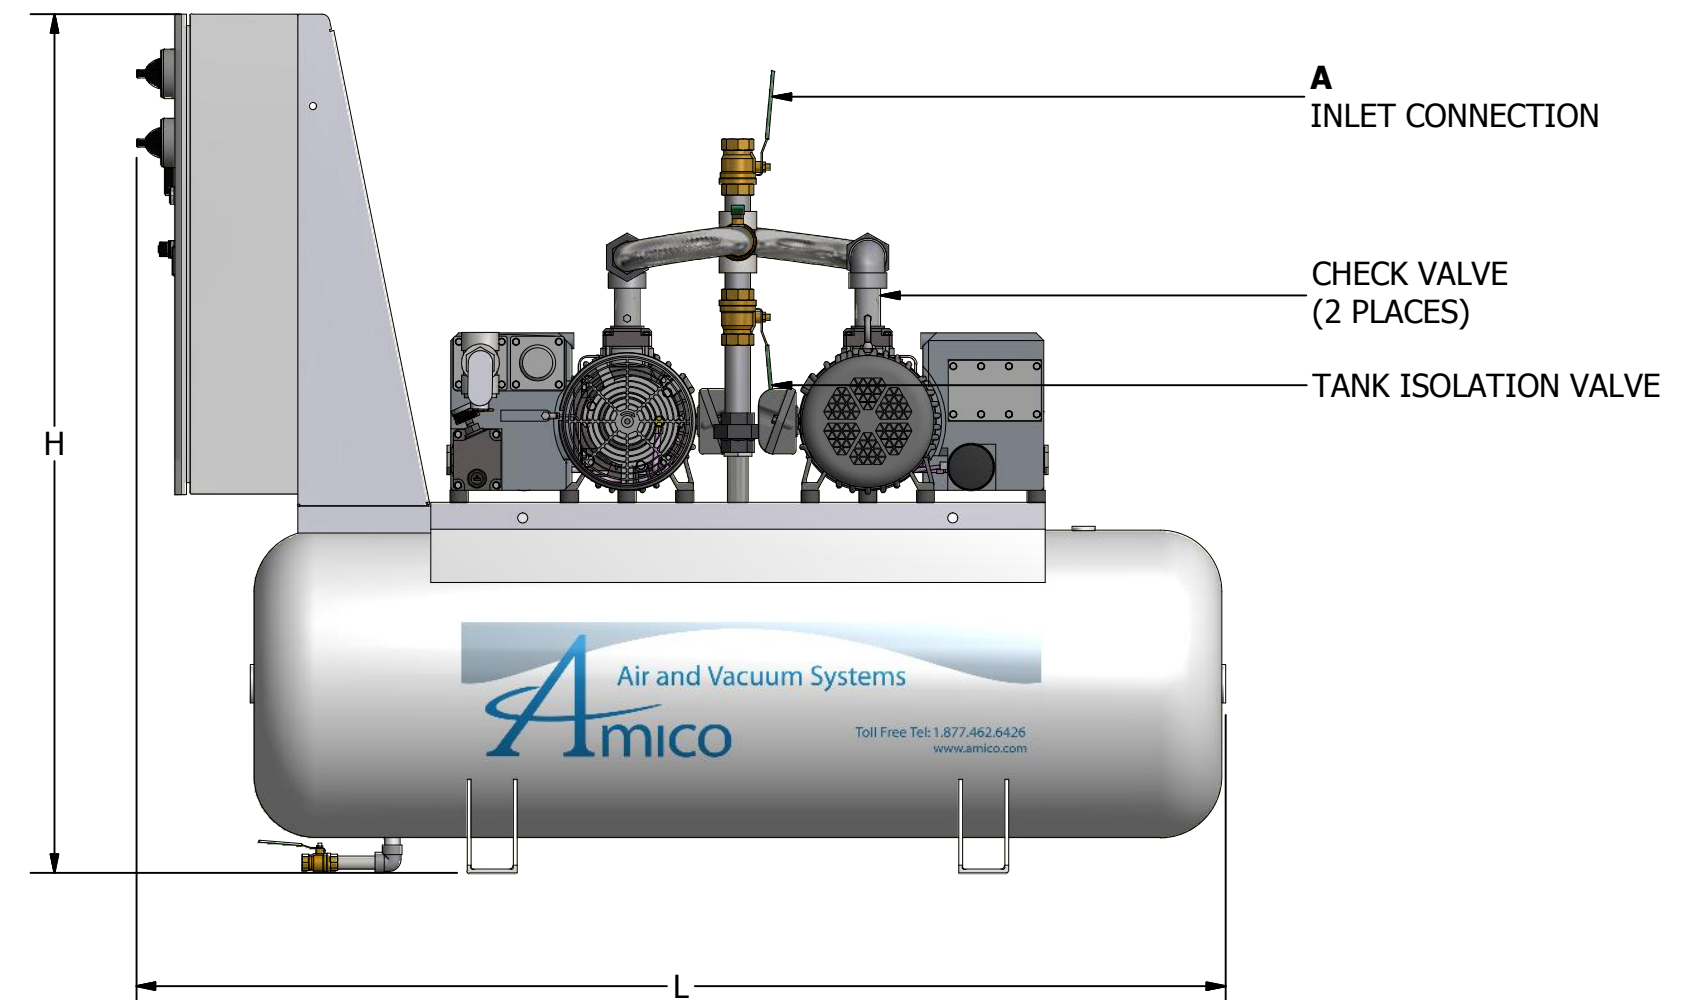
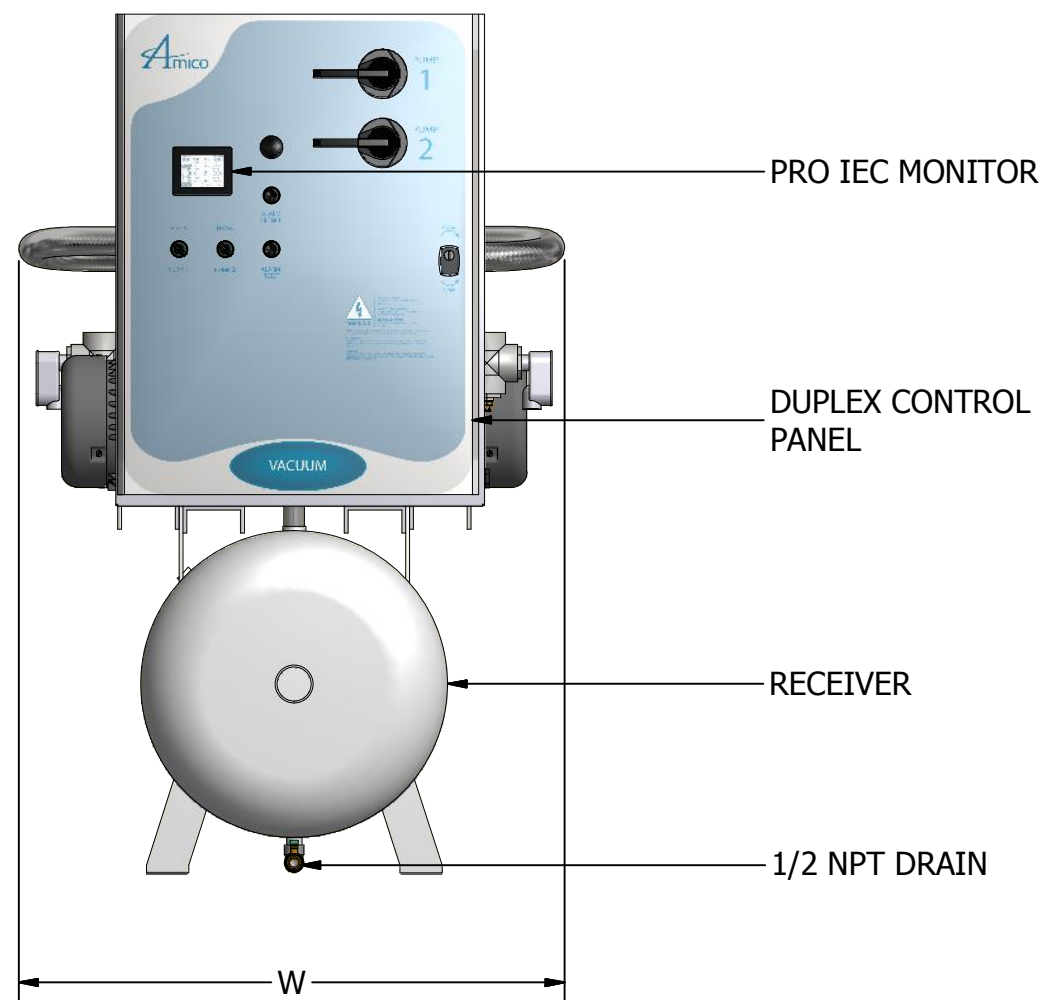
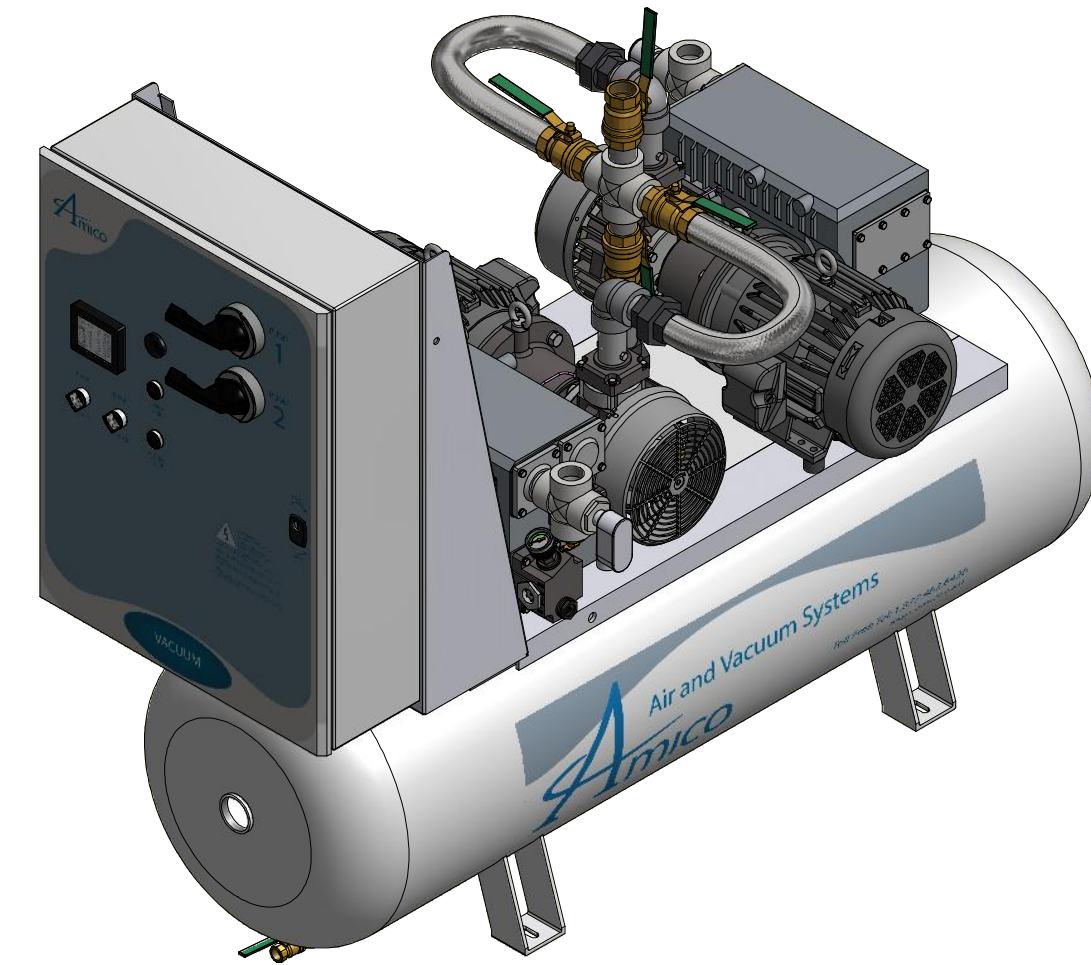


ROTARY VANE - LUBRICATED DUPLEX TANK MOUNTED VACUUM SYSTEM (1.0 HP - 10.0 HP)

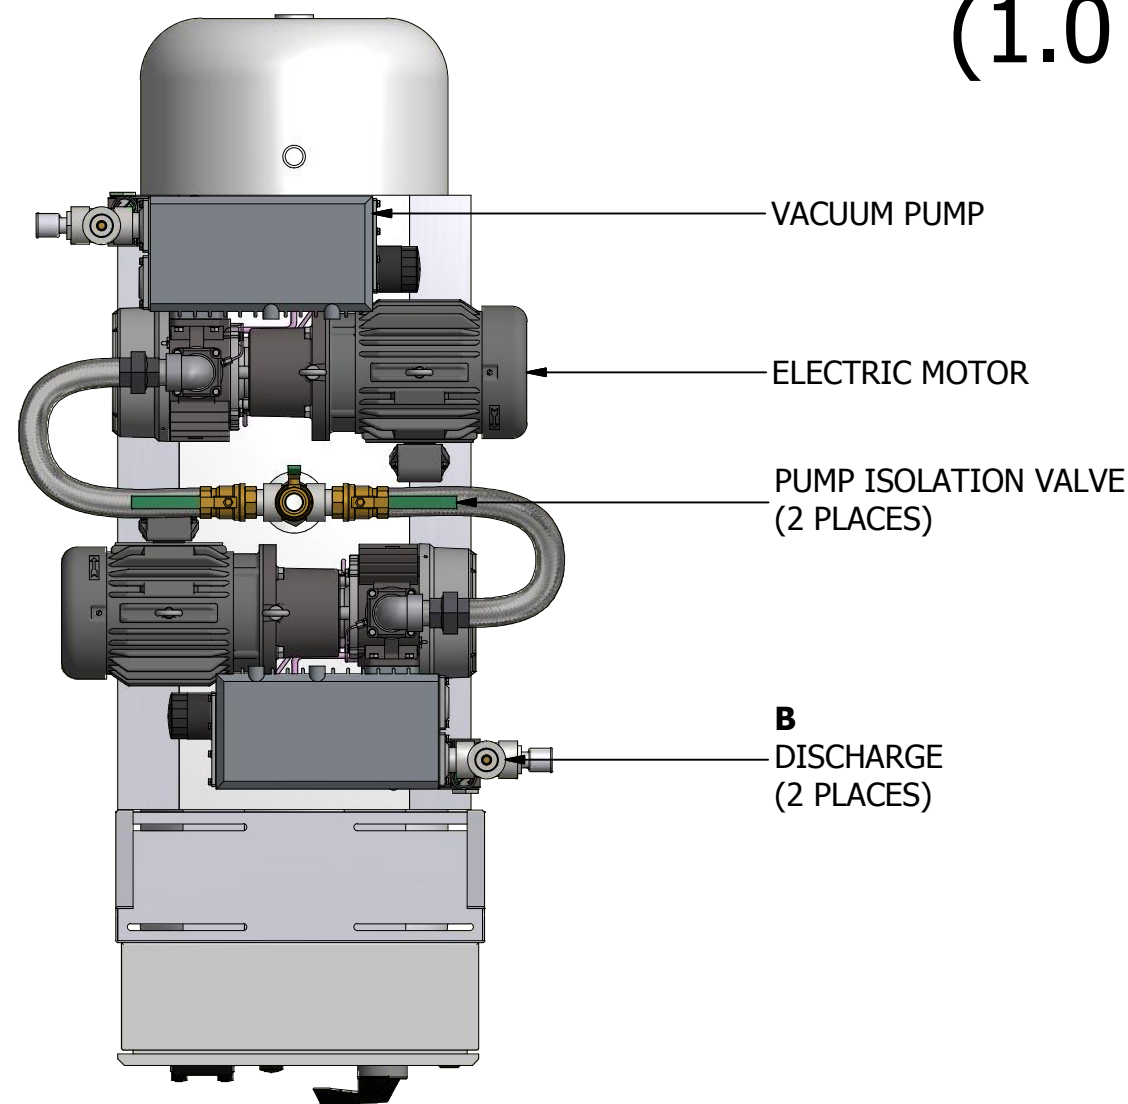

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE





MODEL	HP (KW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL COMPRESSORS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V	460V					
					V-RVL-D-080P-TH-N-010	1 (0.75)	0.75	0.75			80 (303)	4.6 (130)	5.5 (156)	4.6 (130)					
V-RVL-D-080P-TH-N-015	1.5 (1.12)	1.25	1.25	80 (303)	5.8 (165)	7.0 (198)	5.8 (165)	7.0 (198)	1064 (482)	19.4 (1.81)	10	8	5	4	3,818	70	40 (1.02)	70 (1.78)	60 (1.52)
V-RVL-D-080P-TH-N-020	2 (1.49)	1.25	1.25	80 (303)	9.2 (260)	11.0 (311)	9.2 (260)	11.0 (311)	1041 (472)	16.5 (1.54)	12	11	6	5	5,091	70	34 (0.86)	70 (1.78)	60 (1.52)
V-RVL-D-080P-TH-N-030	3 (2.24)	1.25	1.25	80 (303)	14.2 (401)	17.0 (481)	14.2 (401)	17.0 (481)	1213 (550)	20.8 (1.94)	18	16	9	8	7,636	70	40 (1.02)	75 (1.91)	60 (1.52)
V-RVL-D-120P-TH-N-050	5 (3.73)	2.0	2.0	120 (454)	30.8 (873)	37.0 (1048)	30.8 (873)	37.0 (1048)	1795 (814)	30.9 (2.87)	29	26	15	13	12,727	79	57 (1.45)	78 (1.98)	66 (1.68)
V-RVL-D-120P-TH-N-075	7.5 (5.59)	2.0	2.0	120 (454)	43.3 (1227)	52.0 (1472)	43.3 (1227)	52.0 (1472)	1941 (880)	30.6 (2.84)	42	41	24	20	19,091	79	55 (1.40)	80 (2.03)	65 (1.65)
V-RVL-D-120P-TH-N-100	10 (7.46)	2.0	2.0	120 (454)	64.2 (1817)	77.0 (2180)	64.2 (1817)	77.0 (2180)	2204 (100)	32.2 (2.99)	53	51	30	26	25,455	81	58 (1.47)	80 (2.03)	65 (1.65)

ADDITIONAL MODELS AVAILABLE UPON REQUEST



85 Fulton Way, Richmond Hill
Ontario, L4B 2N4 Canada
71 East Industry Court
Deer Park, NY 11729
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986

ROTARY VANE - LUBRICATED DUPLEX STACK MOUNTED VACUUM SYSTEM (1.0 HP - 50.0 HP)

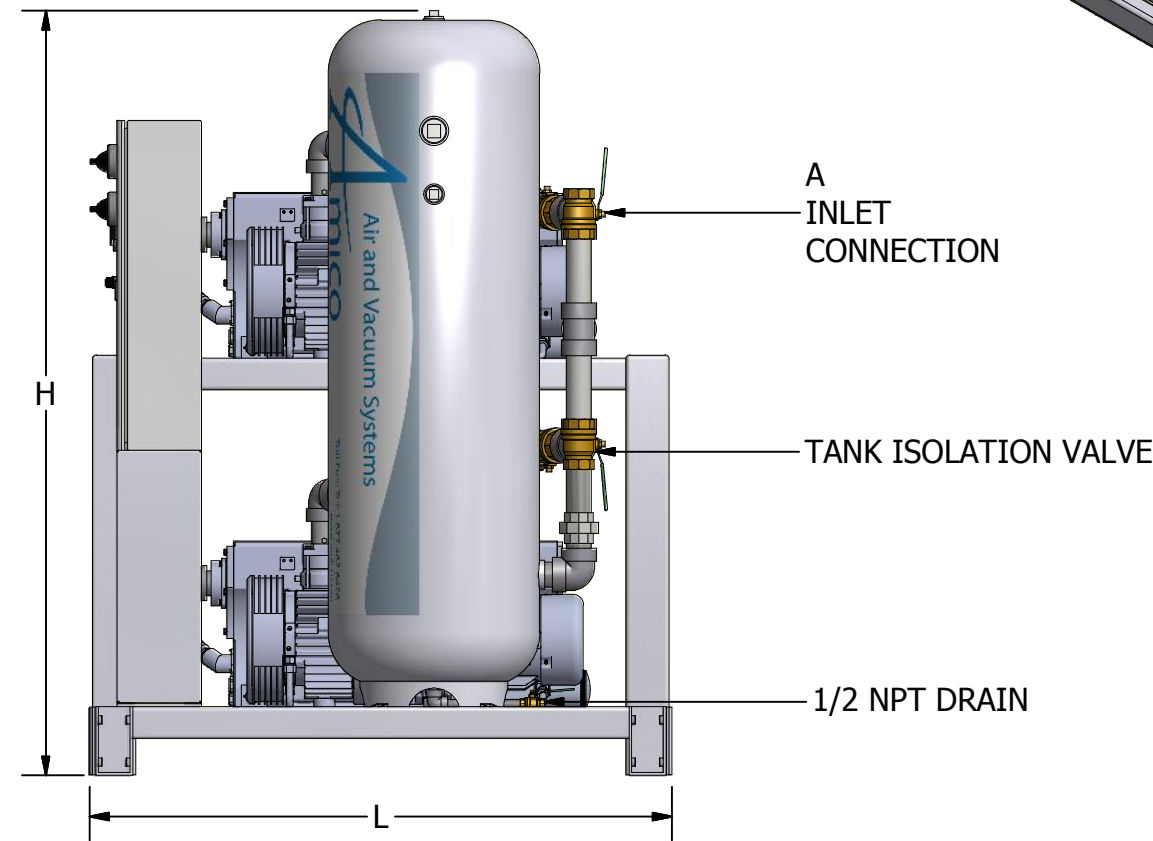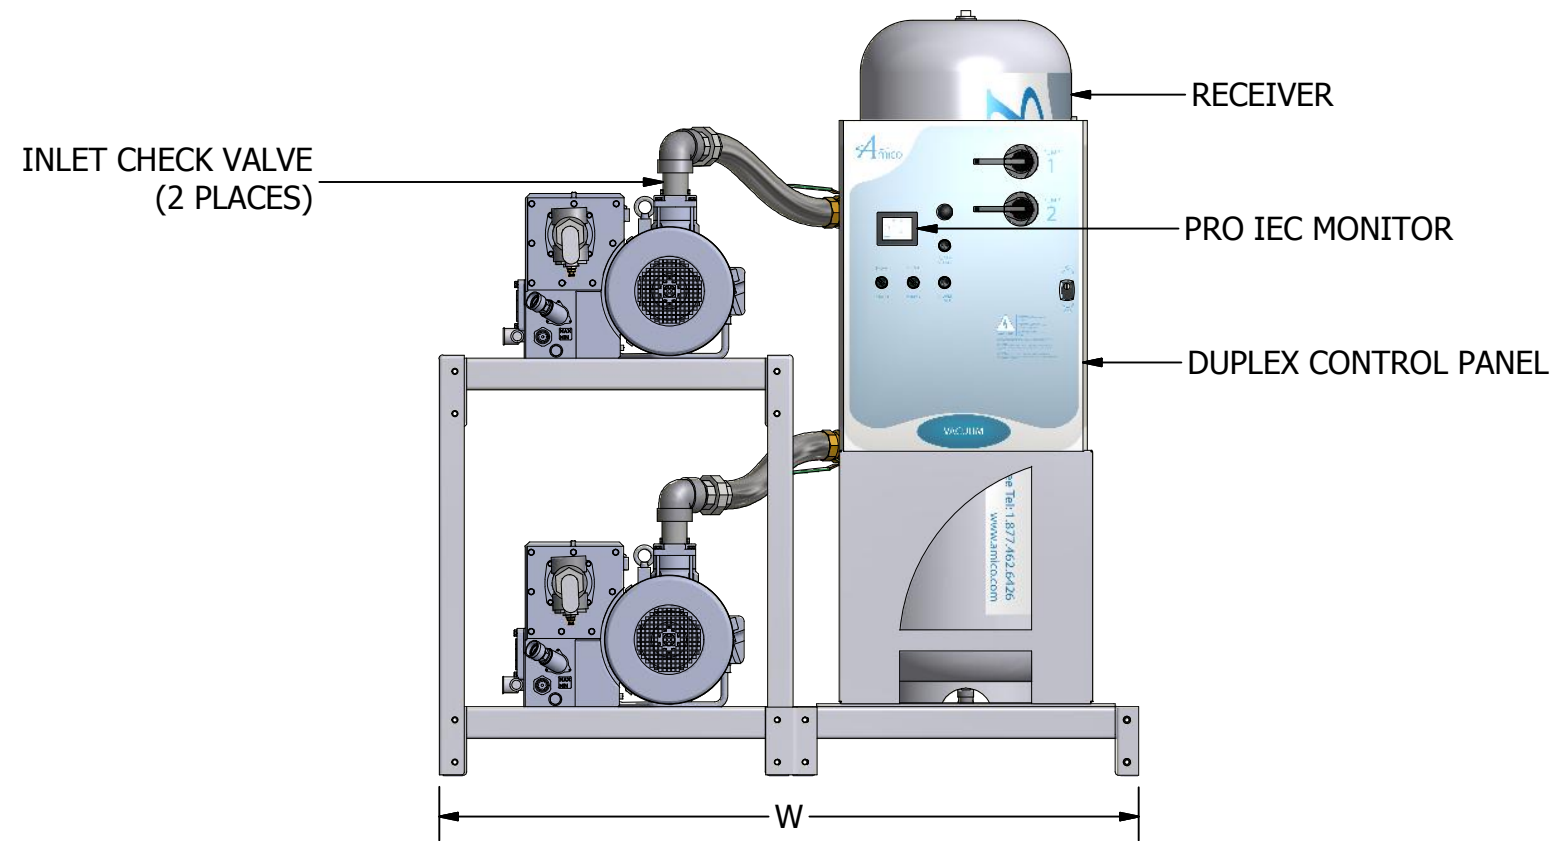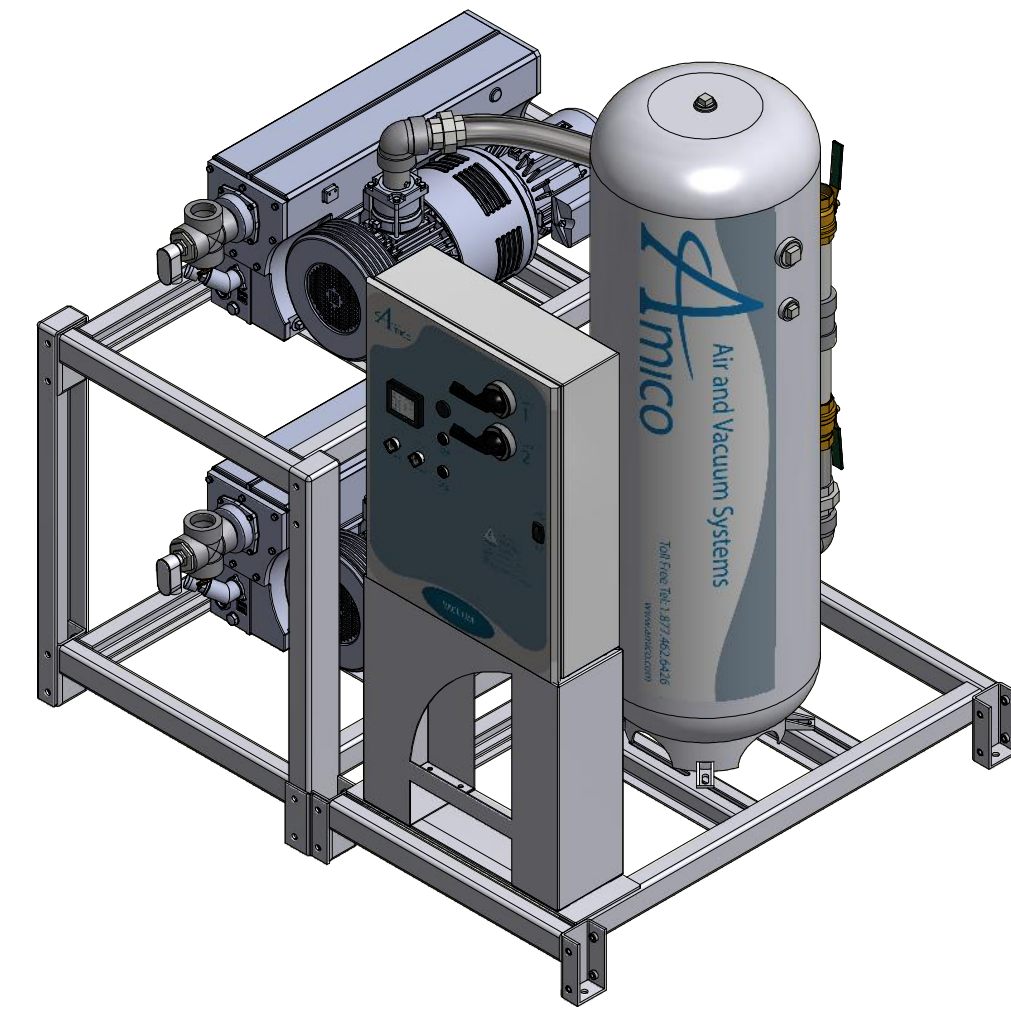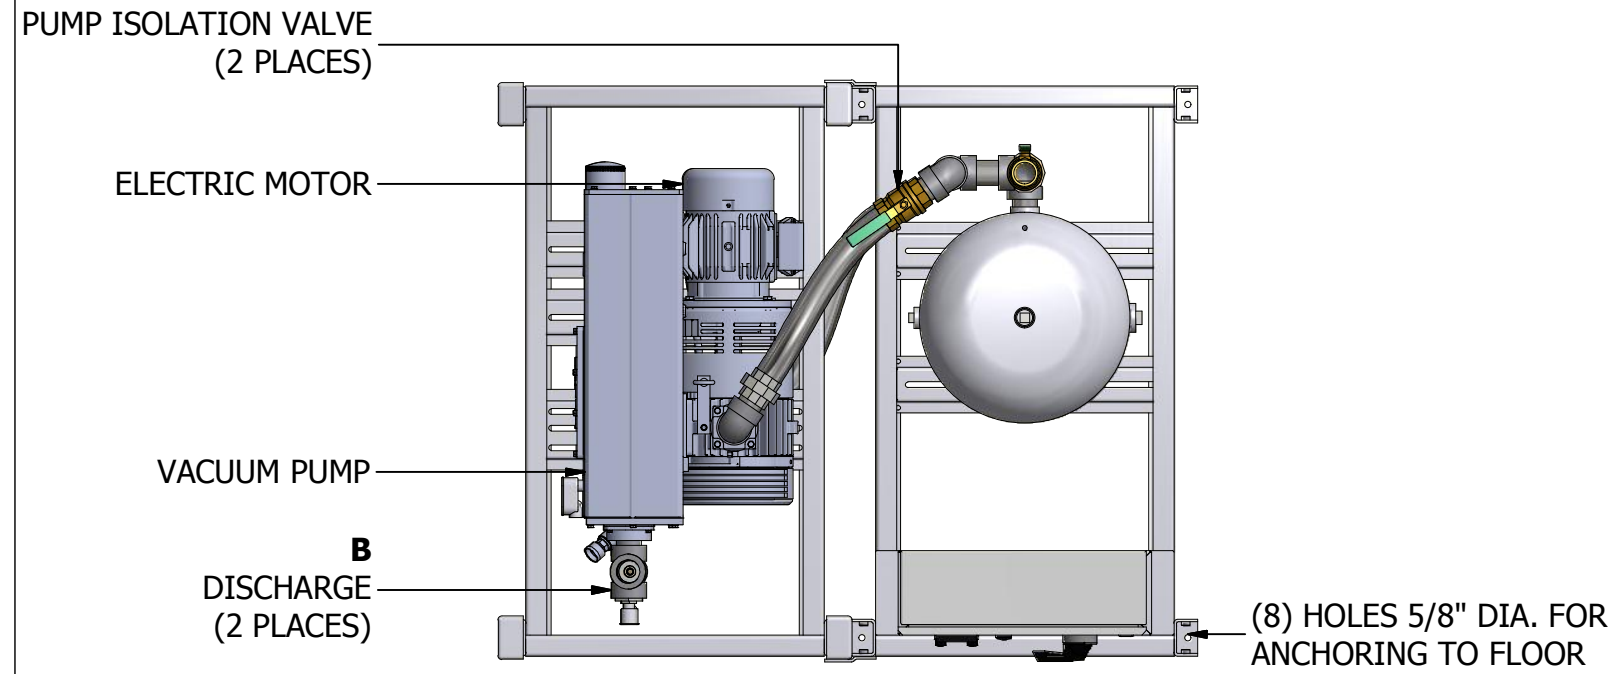

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL	HP (KW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL COMPRESSORS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V	460V					
V-RVL-D-200P-SS-N-010*	1 (0.75)	0.75	0.75	200 (757)	4.6 (130)	5.5 (156)	4.6 (130)	5.5 (156)	1349 (612)	25.7 (2.37)	7	7	4	4	2,545	72	66 (1.70)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-015*	1.5 (1.12)	1.25	1.25	200 (757)	5.8 (165)	7.0 (198)	5.8 (165)	7.0 (198)	1523 (691)	25.7 (2.38)	10	8	5	4	3,818	70	66 (1.68)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-020*	2 (1.49)	1.25	1.25	200 (757)	9.2 (260)	11.0 (311)	9.2 (260)	11.0 (311)	1551 (704)	25.7 (2.38)	12	11	6	5	5,091	70	66 (1.68)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-030*	3 (2.24)	1.25	1.25	200 (757)	14.2 (401)	17.0 (481)	14.2 (401)	17.0 (481)	1655 (751)	25.7 (2.38)	18	16	9	8	7,636	70	66 (1.68)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-050	5 (3.73)	2.0	2.0	200 (757)	30.8 (873)	37.0 (1048)	30.8 (873)	37.0 (1048)	2262 (1026)	26.1 (2.42)	29	26	15	13	12,727	79	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-075	7.5 (5.59)	2.0	2.0	200 (757)	43.3 (1227)	52.0 (1472)	43.3 (1227)	52.0 (1472)	2408 (1092)	26.1 (2.42)	42	41	24	20	19,091	79	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-100	10 (7.46)	2.0	2.0	200 (757)	64.2 (1817)	77.0 (2180)	64.2 (1817)	77.0 (2180)	2688 (1219)	26.1 (2.42)	53	51	30	26	25,455	81	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-D-200P-SS-N-150*	15 (11.2)	3.0	3.0	200 (757)	92.5 (2619)	111.0 (3143)	92.5 (2619)	111.0 (3143)	4039 (1832)	51.1 (4.75)	81	75	45	37	38,182	83	92 (2.34)	80 (2.03)	90 (2.29)
V-RVL-D-200P-SS-N-200*	20 (14.9)	3.0	3.0	200 (757)	114.2 (3233)	137.0 (3879)	114.2 (3233)	137.0 (3879)	4367 (1981)	51.1 (4.75)	108	104	56	52	50,909	84	92 (2.34)	80 (2.03)	90 (2.29)
V-RVL-D-200P-SS-N-250*	25 (18.6)	3.0	3.0	200 (757)	140.0 (3964)	168.0 (4757)	140.0 (3964)	168.0 (4757)	4785 (2170)	51.1 (4.75)	140	124	74	62	63,611	85	92 (2.34)	80 (2.03)	90 (2.29)
V-RVL-D-200P-SS-N-300*	30 (22.4)	4.0	3.0	200 (757)	165.0 (4668)	198.0 (5601)	165.0 (4668)	198.0 (5601)	5116 (2321)	80.0 (7.43)	-	148	90	80	76,333	81	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-D-200P-SS-N-400*	40 (29.8)	4.0	3.0	200 (757)	201.0 (5701)	242.0 (6841)	201.0 (5701)	242.0 (6841)	6642 (3013)	91.7 (8.53)	-	198	102	-	101,777	83	150 (3.81)	88 (2.24)	90 (2.29)
V-RVL-D-200P-SS-N-500*	50 (37.3)	4.0	3.0	200 (757)	246.0 (6968)	295.0 (8362)	246.0 (6968)	295.0 (8362)	6672 (3026)	91.7 (8.53)	-	244	128	122	127,222	84	150 (3.81)	88 (2.24)	90 (2.29)


*SYSTEM CONFIGURATION DIFFERS FROM MODEL SHOWN

ADDITIONAL MODELS AVAILABLE UPON REQUEST



85 Fulton Way, Richmond Hill
Ontario, L4B 2N4 Canada
71 East Industry Court
Deer Park, NY 11729
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986

ROTARY VANE - LUBRICATED DUPLEX "SPACE SAVER" VACUUM SYSTEM (1.0 HP - 10.0 HP)

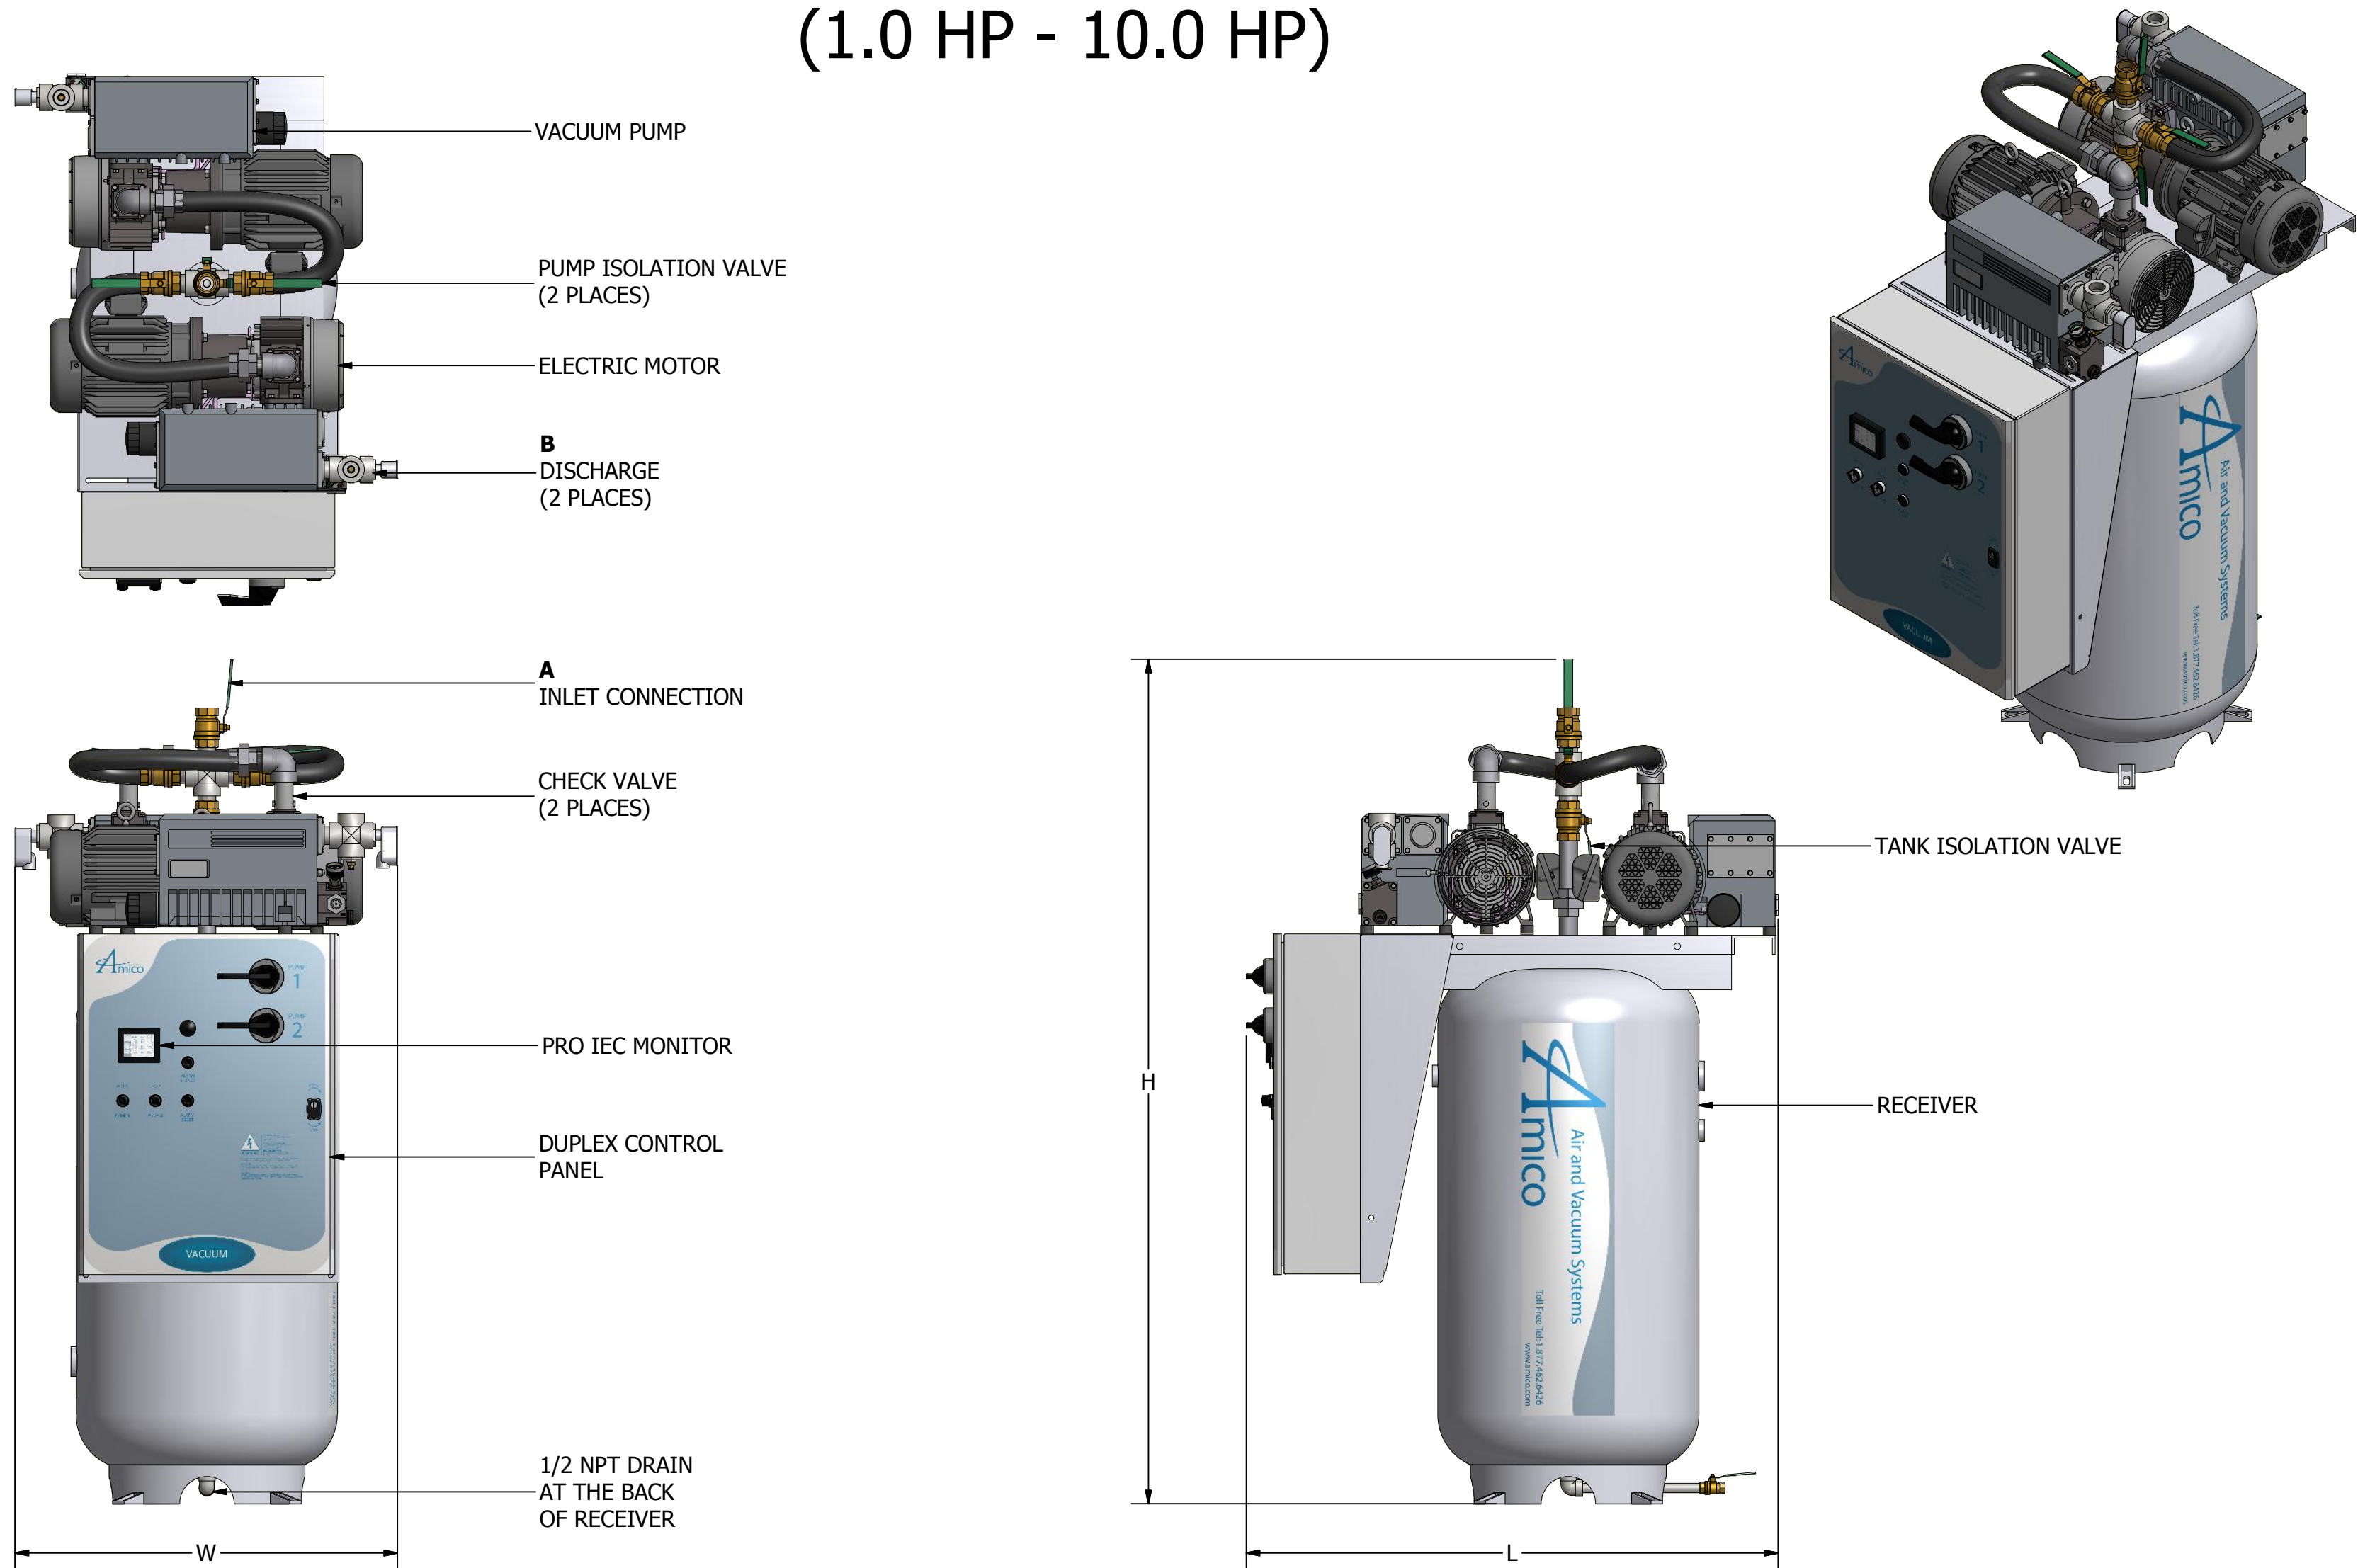

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

ADDITIONAL MODELS AVAILABLE UPON REQUEST





MODEL	HP (KW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL COMPRESSORS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V	460V					
					V-RVL-D-080P-TS-N-010	1 (0.75)	0.75	0.75			80 (303)	4.6 (130)	5.5 (156)	4.6 (130)					
V-RVL-D-080P-TS-N-015	1.5 (1.12)	1.25	1.25	80 (303)	5.8 (165)	7.0 (198)	5.8 (165)	7.0 (198)	1058 (480)	11.4 (1.06)	10	8	5	4	3,818	70	35 (0.89)	47 (1.19)	82 (2.08)
V-RVL-D-080P-TS-N-020	2 (1.49)	1.25	1.25	80 (303)	9.2 (260)	11.0 (311)	9.2 (260)	11.0 (311)	1035 (469)	11.4 (1.06)	12	11	6	5	5,091	70	35 (0.89)	47 (1.19)	82 (2.08)
V-RVL-D-080P-TS-N-030	3 (2.24)	1.25	1.25	80 (303)	14.2 (401)	17.0 (481)	14.2 (401)	17.0 (481)	1207 (547)	13.9 (1.29)	18	16	9	8	7,636	70	40 (1.02)	50 (1.27)	82 (2.08)
V-RVL-D-120P-TS-N-050	5 (3.73)	2.0	2.0	120 (454)	30.8 (873)	37.0 (1048)	30.8 (873)	37.0 (1048)	1828 (829)	15.3 (1.42)	29	26	15	13	12,727	79	40 (1.02)	55 (1.40)	85 (2.16)
V-RVL-D-120P-TS-N-075	7.5 (5.59)	2.0	2.0	120 (454)	43.3 (1227)	52.0 (1472)	43.3 (1227)	52.0 (1472)	1974 (895)	24.6 (2.28)	42	41	24	20	19,091	79	58 (1.47)	61 (1.55)	85 (2.16)
V-RVL-D-120P-TS-N-100	10 (7.46)	2.0	2.0	120 (454)	64.2 (1817)	77.0 (2180)	64.2 (1817)	77.0 (2180)	2237 (1015)	27.5 (2.55)	53	51	30	26	25,455	81	60 (1.52)	66 (1.68)	85 (2.16)



85 Fulton Way, Richmond Hill
Ontario, L4B 2N4 Canada
71 East Industry Court
Deer Park, NY 11729
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986

www.amico.com

ROTARY VANE - LUBRICATED QUADRAPLEX STACK MOUNTED VACUUM SYSTEM (1.0 HP - 50.0 HP)

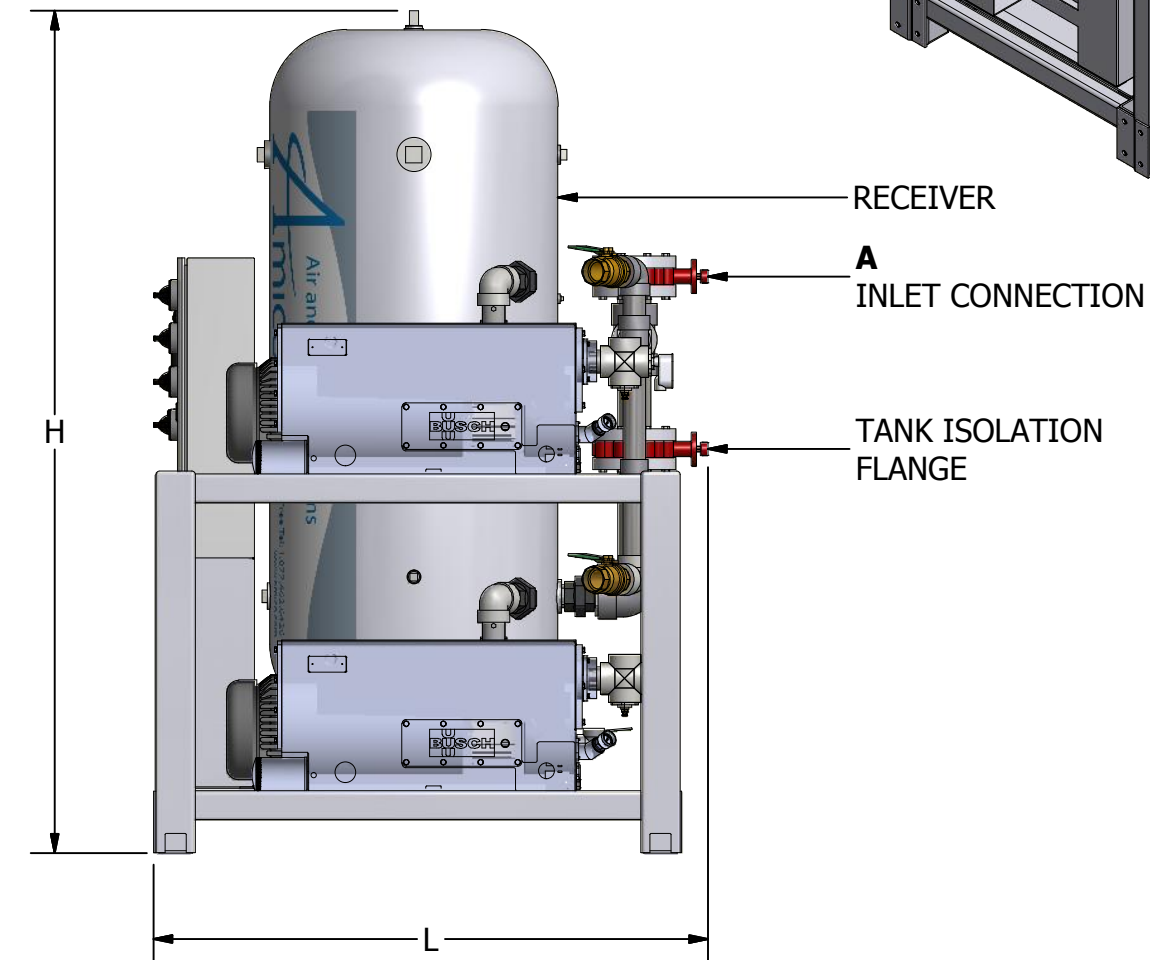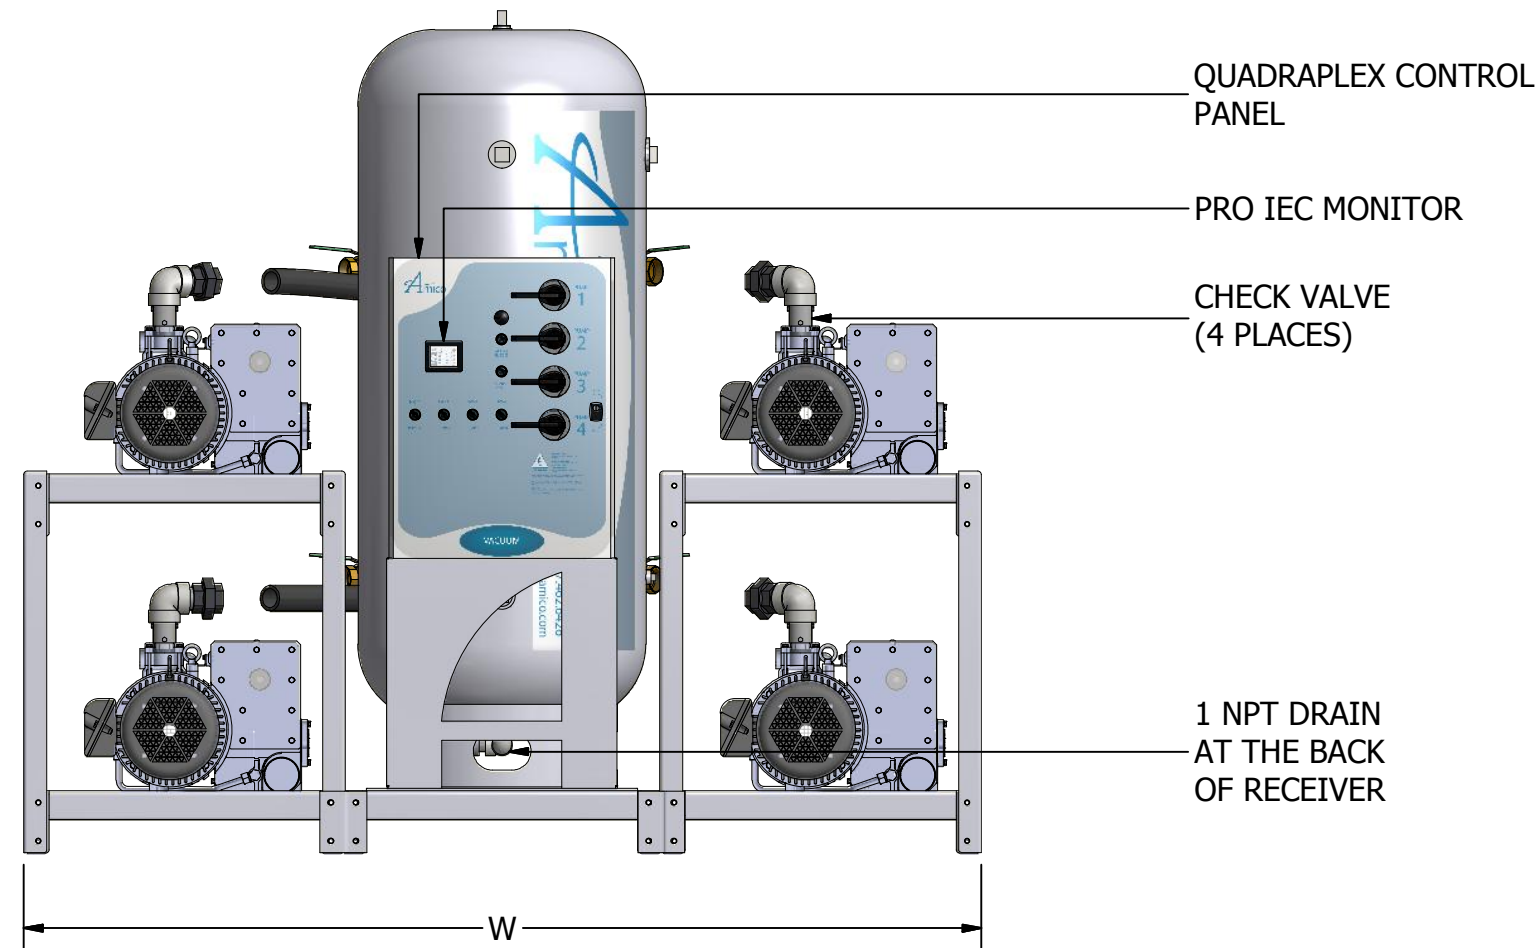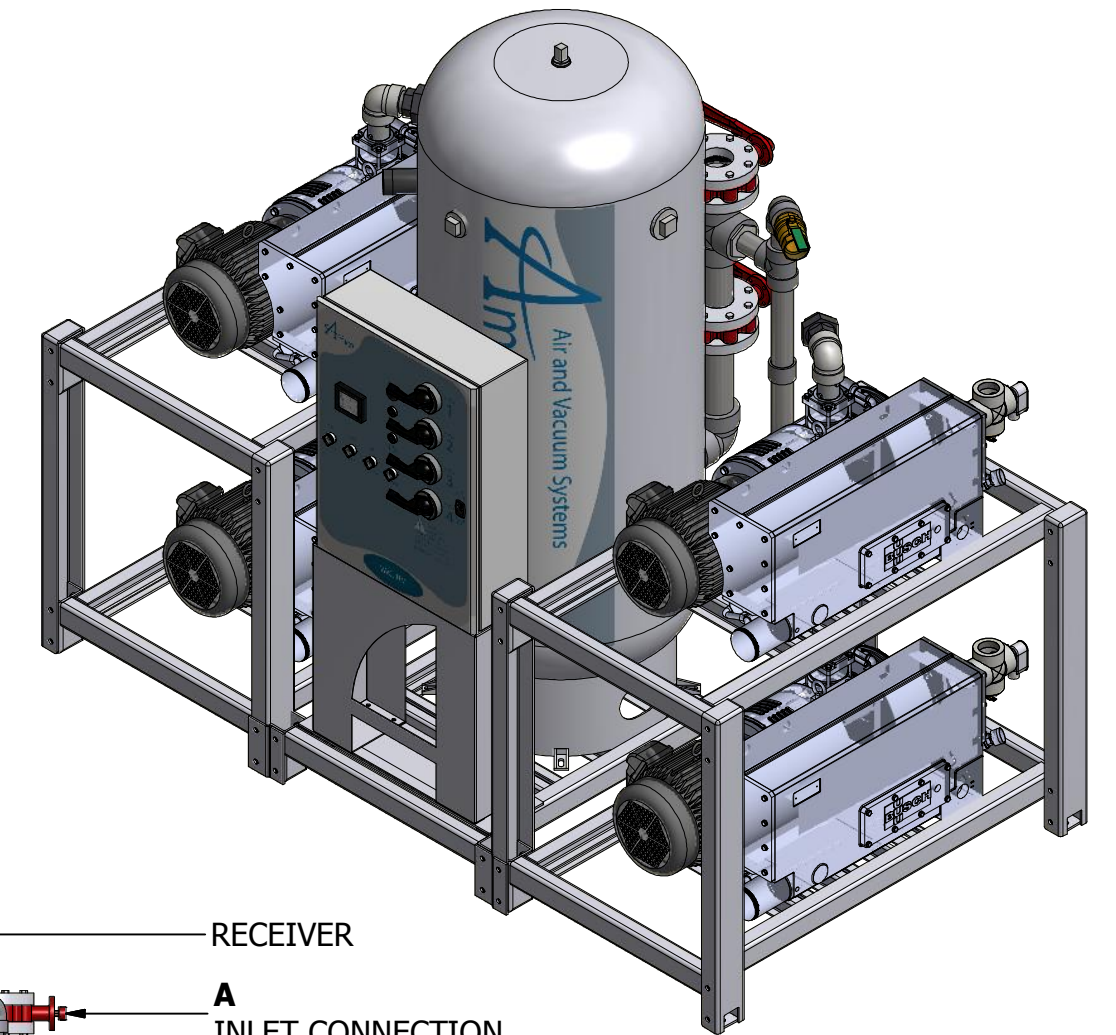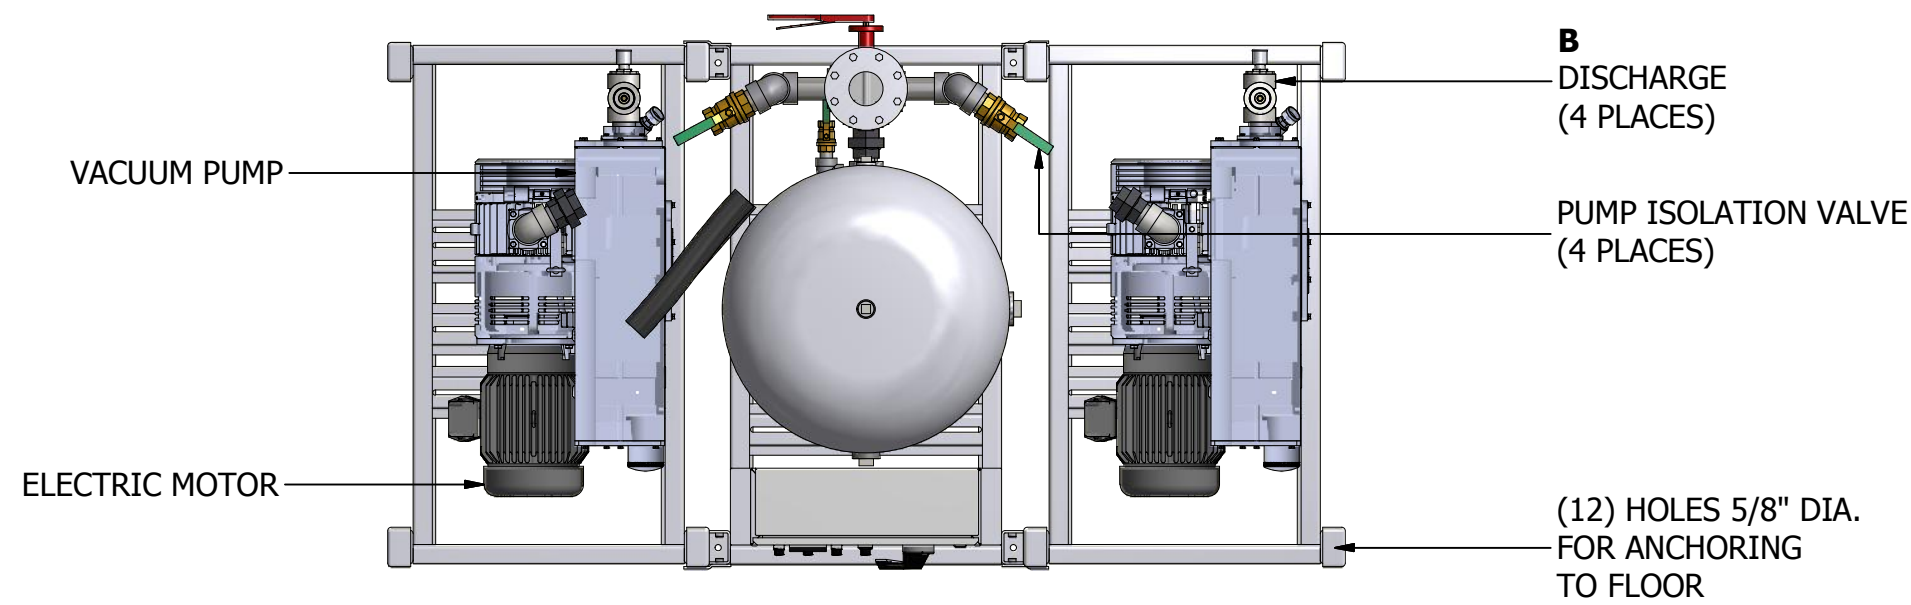

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL	HP (kW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL COMPRESSORS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V	460V					
V-RVL-Q-200P-SS-N-010*	1 (0.75)	1.25	0.75	200 (757)	4.6 (130)	5.5 (156)	13.8 (389)	16.5 (467)	1833 (831)	26.1 (2.42)	14	14	8	8	7,635	77	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-Q-200P-SS-N-015*	1.5 (1.12)	2.0	1.25	200 (757)	5.8 (165)	7.0 (198)	17.5 (496)	21.0 (595)	2131 (967)	26.1 (2.42)	20	17	10	8	11,454	75	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-Q-200P-SS-N-020*	2 (1.49)	2.0	1.25	200 (757)	9.2 (260)	11.0 (311)	27.5 (779)	33.0 (934)	2187 (992)	26.1 (2.42)	25	22	12	11	15,273	75	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-Q-200P-SS-N-030*	3 (2.24)	2.0	1.25	200 (757)	14.2 (401)	17.0 (481)	42.5 (1203)	51.0 (1444)	2395 (1086)	26.1 (2.42)	36	31	18	16	22,908	75	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-Q-200P-SS-N-050	5 (3.73)	4.0	2.0	200 (757)	30.8 (873)	37.0 (1048)	92.5 (2619)	111.0 (3143)	3517 (1595)	51.9 (4.82)	58	52	29	26	38,181	84	115 (2.92)	65 (1.65)	91 (2.31)
V-RVL-Q-200P-SS-N-075	7.5 (5.59)	4.0	2.0	200 (757)	43.3 (1227)	52.0 (1472)	130.0 (3681)	156.0 (4417)	3809 (1728)	51.9 (4.82)	84	82	48	41	57,273	84	115 (2.92)	65 (1.65)	91 (2.31)
V-RVL-Q-200P-SS-N-100	10 (7.46)	4.0	2.0	200 (757)	64.2 (1817)	77.0 (2180)	192.5 (5451)	231.0 (6541)	4369 (1982)	51.9 (4.82)	106	102	60	51	76,365	86	115 (2.92)	65 (1.65)	91 (2.31)
V-RVL-Q-200P-SS-N-150*	15 (11.2)	5.0	3.0	200 (757)	92.5 (2619)	111.0 (3143)	277.5 (7858)	333.0 (9429)	6988 (3170)	80.0 (7.43)	162	150	89	75	114,546	88	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-Q-200P-SS-N-200*	20 (14.9)	5.0	3.0	200 (757)	114.2 (3233)	137.0 (3879)	342.5 (9699)	411.0 (11638)	7644 (3467)	80.0 (7.43)	216	208	112	104	152,727	89	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-Q-200P-SS-N-250*	25 (18.6)	5.0	3.0	200 (757)	140.0 (3964)	168.0 (4757)	420.0 (11893)	504.0 (14272)	8480 (3847)	80.0 (7.43)	280	248	148	124	190,833	90	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-Q-200P-SS-N-300*	30 (22.4)	6.0	3.0	200 (757)	165.0 (4668)	198.0 (5601)	495.0 (14003)	593.0 (16803)	9087 (4122)	137.8 (12.80)	-	296	180	160	228,999	86	248 (6.30)	80 (2.03)	90 (2.29)
V-RVL-Q-200P-SS-N-400*	40 (29.8)	6.0	3.0	200 (757)	201.0 (5701)	242.0 (6841)	604.0 (17103)	725.0 (20524)	12134 (5504)	151.6 (14.11)	-	396	204	-	305,331	88	248 (6.30)	88 (2.24)	90 (2.29)
V-RVL-Q-200P-SS-N-500*	50 (37.3)	6.0	3.0	200 (757)	246.0 (6968)	295.0 (8362)	738.0 (20905)	886.0 (25086)	12194 (5531)	151.6 (14.11)	-	488	256	244	381,666	89	248 (6.30)	88 (2.24)	90 (2.29)


*SYSTEM CONFIGURATION DIFFERS FROM MODEL SHOWN

ADDITIONAL MODELS AVAILABLE UPON REQUEST



85 Fulton Way, Richmond Hill
Ontario, L4B 2N4 Canada
71 East Industry Court
Deer Park, NY 11729
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986

ROTARY VANE - LUBRICATED TRIPLEX STACK MOUNTED VACUUM SYSTEM (1.0 HP - 50.0 HP)

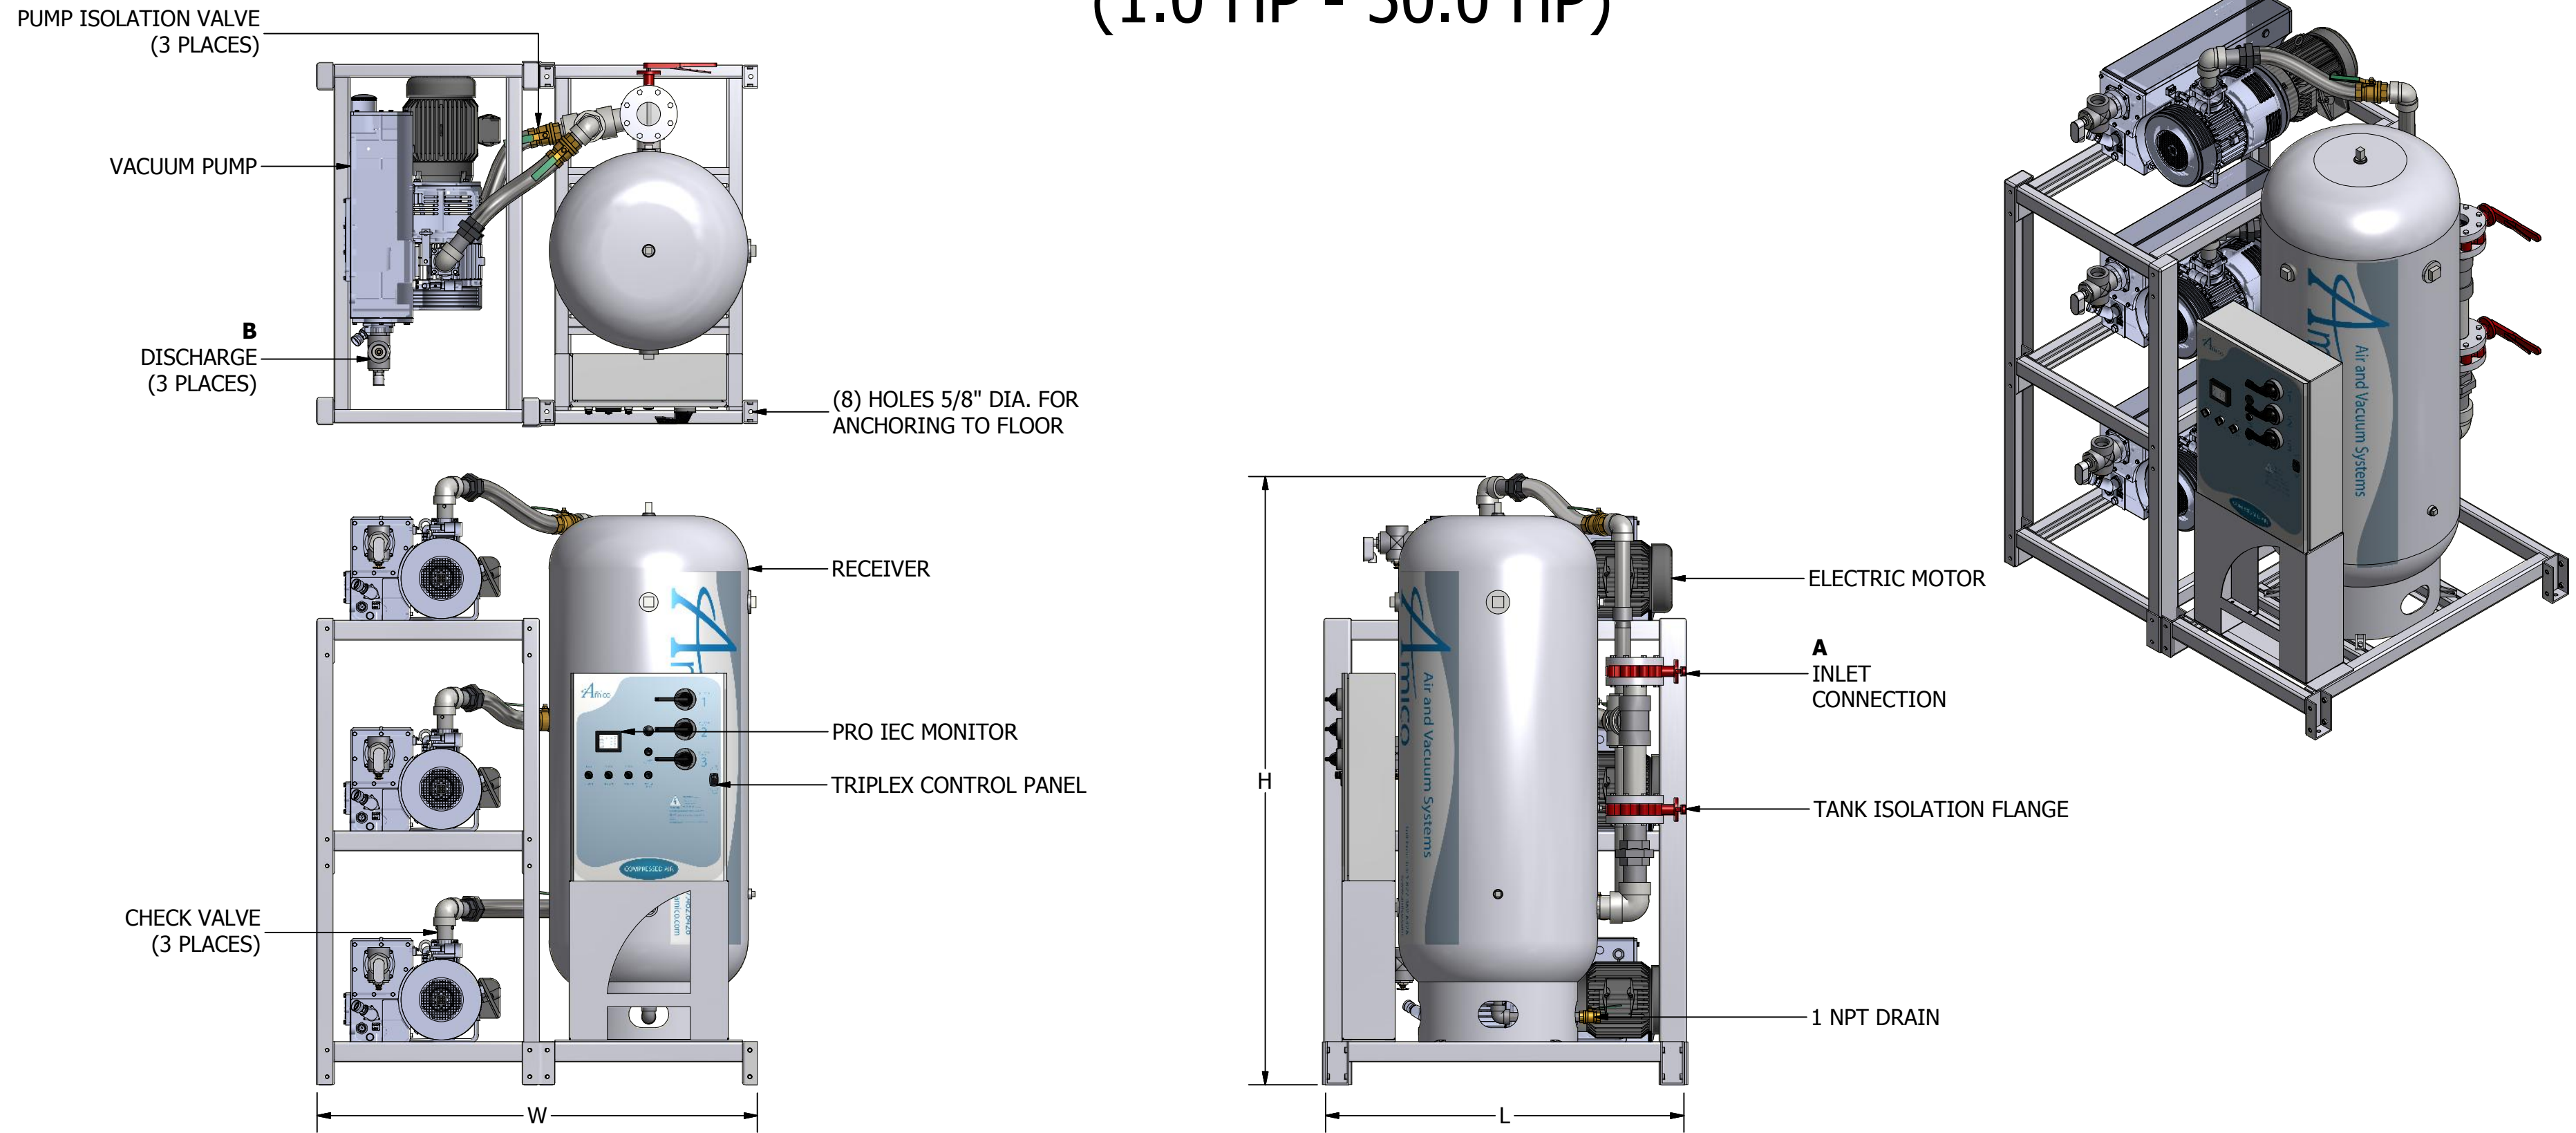

DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE

MODEL	HP (KW)	A INLET NPT	B OUTLET NPT	TANK SIZE GALLON (LITRE)	PUMP SCFM @ 19" HG (LPM)		NFPA SYSTEM CAPACITIES WITH ONE COMPRESSOR ON STANDBY @ 19" HG (LPM)		WEIGHT IN LBS (KG)	SQ. FT. REQUIRED (M ²)	SYSTEM FLA (WITH ALL COMPRESSORS RUNNING)				SYSTEM BTU/HR	SOUND LEVEL dB (A)	W (M)	L (M)	H (M)
					50 Hz Motor	60 Hz Motor	50 Hz Motor	60 Hz Motor			208V	230V	380V	460V					
					V-RVL-T-200P-SS-N-010*	1 (0.75)	1.0	0.75			200 (757)	4.6 (130)	5.5 (156)	9.2 (260)					
V-RVL-T-200P-SS-N-015*	1.5 (1.12)	1.5	1.25	200 (757)	5.8 (165)	7.0 (198)	11.7 (330)	14.0 (396)	1928 (875)	26.1 (2.42)	15	13	8	6	7,636	73	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-T-200P-SS-N-020*	2 (1.49)	1.5	1.25	200 (757)	9.2 (260)	11.0 (311)	18.3 (519)	22.0 (623)	1970 (894)	26.1 (2.42)	19	16	9	8	10,182	73	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-T-200P-SS-N-030*	3 (2.24)	1.5	1.25	200 (757)	14.2 (401)	17.0 (481)	28.3 (802)	34.0 (963)	2126 (964)	26.1 (2.42)	27	23	14	12	15,272	73	67 (1.70)	56 (1.42)	91 (2.31)
V-RVL-T-200P-SS-N-050	5 (3.73)	3.0	2.0	200 (757)	30.8 (873)	37.0 (1048)	61.7 (1746)	74.0 (2095)	2951 (1339)	26.1 (2.42)	44	39	22	20	25,454	81	67 (1.70)	56 (1.42)	97 (2.46)
V-RVL-T-200P-SS-N-075	7.5 (5.59)	3.0	2.0	200 (757)	43.3 (1227)	52.0 (1472)	86.7 (2454)	104.0 (2945)	3170 (1438)	26.1 (2.42)	63	61	36	31	38,182	84	67 (1.70)	56 (1.42)	97 (2.46)
V-RVL-T-200P-SS-N-100	10 (7.46)	3.0	2.0	200 (757)	64.2 (1817)	77.0 (2180)	128.3 (3634)	154.0 (4361)	3590 (1628)	26.1 (2.42)	79	77	45	38	50,910	84	67 (1.70)	56 (1.42)	97 (2.46)
V-RVL-T-200P-SS-N-150*	15 (11.2)	4.0	3.0	200 (757)	92.5 (2619)	111.0 (3143)	185.0 (5239)	222.0 (6286)	5491 (2491)	80.0 (7.43)	121	112	67	56	76,364	86	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-T-200P-SS-N-200*	20 (14.9)	4.0	3.0	200 (757)	114.2 (3233)	137.0 (3879)	228.3 (6466)	274.0 (7759)	5983 (2714)	80.0 (7.43)	162	156	84	78	101,818	87	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-T-200P-SS-N-250*	25 (18.6)	4.0	3.0	200 (757)	140.0 (3964)	168.0 (4757)	280.0 (7929)	336.0 (9514)	6610 (2998)	80.0 (7.43)	210	186	111	93	127,222	88	144 (3.66)	80 (2.03)	90 (2.29)
V-RVL-T-200P-SS-N-300*	30 (22.4)	5.0	3.0	200 (757)	165.0 (4668)	198.0 (5601)	330.0 (9335)	396.0 (11202)	7144 (3240)	108.9 (10.12)	-	222	135	120	152,666	84	196 (4.98)	80 (2.03)	90 (2.29)
V-RVL-T-200P-SS-N-400*	40 (29.8)	5.0	3.0	200 (757)	201.0 (5701)	242.0 (6841)	403.0 (11402)	484.0 (13705)	9428 (4277)	119.8 (11.13)	-	297	153	-	203,554	86	196 (4.98)	88 (2.24)	90 (2.29)
V-RVL-T-200P-SS-N-500*	50 (37.3)	5.0	3.0	200 (757)	246.0 (6968)	295.0 (8362)	492.0 (13937)	591.0 (16724)	9473 (4297)	119.8 (11.13)	-	366	192	183	254,444	87	196 (4.98)	88 (2.24)	90 (2.29)

*SYSTEM CONFIGURATION DIFFERS FROM MODEL SHOWN

ADDITIONAL MODELS AVAILABLE UPON REQUEST



85 Fulton Way, Richmond Hill
Ontario, L4B 2N4 Canada
71 East Industry Court
Deer Park, NY 11729
Direct Tel: 905.764.0800
Tel: 1.877.462.6426
Fax: 1.866.440.4986