


Amico Alert-4 Series LCD Area and Master Combo Ethernet Alarm

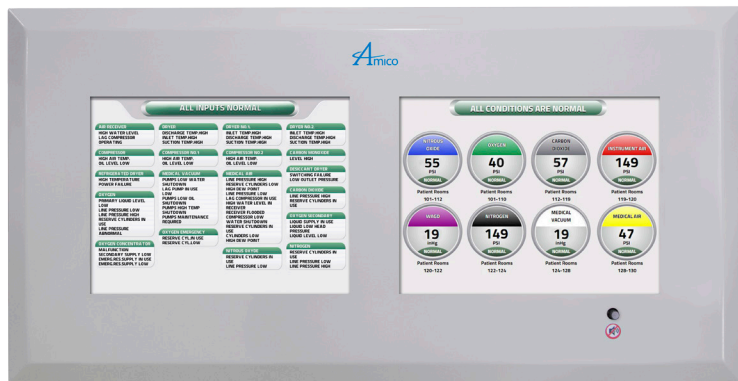

General Specifications:

The Amico Digital LCD Area and Master Combo Ethernet Alarm system shall be an Amico Alert-4 series, complete with a five-year warranty. Each LCD Alarm shall be microprocessor based and field adjustable.

The alarm system is Ethernet capable for convenient viewing remotely or wirelessly, anywhere in the building.

The Area Alarm can monitor up to 8 gases and the Master Alarm can monitor up to 30 channels.

The Master Alarm channels can be grouped together or separated using Amico Master Configuration Software. The Area Alarm gas sensor can auto-detect gases and the High/Low set points are field adjustable.

Real time Ethernet monitoring capability via computer or mobile devices. Compatible with Internet Explorer, Google Chrome and Safari.

On the Master Alarm, when a channel is in normal condition, the channel will illuminate in green. When a channel is in fault condition, an alarm will sound and both the channel heading and the channel in fault will illuminate in red. The heading will display the channel status in fault. Press and hold the mute button for 20 seconds and the display will show the terminal port for each channel.

On the Area Alarm, when an alarm occurs, the green indicator will change to red and a continuous alarm will sound. Pushing the mute button will cancel the audible alarm, but the unit will remain in the alarm condition until the problem is rectified.

The default set-points shall be +/- 20% variation from the normal condition. To view the set points, press and hold the mute button for 20 seconds.

The box shall be fabricated from 18 gauge (1.3 mm) steel with a 3/8" (9.53 mm) OD type "K" copper pipe for connection to the service line. The box mounting brackets are adjustable to accommodate different wall thicknesses.

Input power: 115-220 VAC, 50-60Hz.

Amico products comply with NFPA 99 and CSA Z73961.

Ethernet Ready


View your alarms on your computer or mobile device.



Features:

- The LCD Alarm shall be capable of displaying the screen image of the alarm on a computer via the facility's ethernet or internet. In addition, an exact screen image of the alarm can be displayed on a mobile device via wifi
- Self-diagnostic and error message display for ease of maintenance
- Sensors will automatically detect gas types
- Field adjustable features
- Five year warranty

Technical Specifications

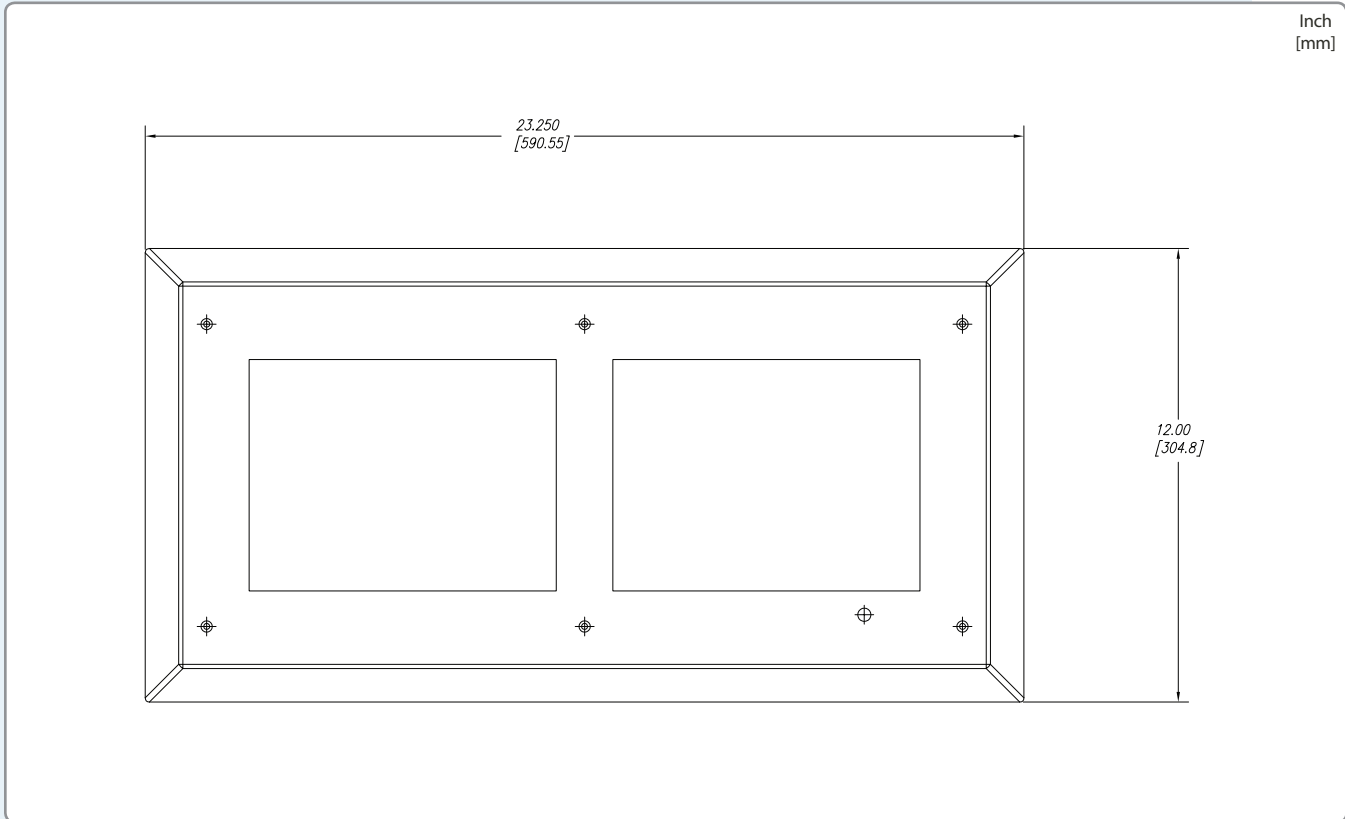

Model Number

A4AM-L-XXXXXXXXXMXX

Area Master LCD Combo

The "L" Defines the Language:

U = English (NFPA)
E = English (CSA/ISO)

The "X" Defines the Type of Gas:

O = Oxygen	C = Carbon Dioxide
A = Medical Air	N = Nitrogen
V = Medical Vacuum	E = AGSS (ISO)
2 = Nitrous Oxide	I = Instrument Air
W = WAGD (NFPA)	

The "XX" Defines the Number of Points:

10 = 1 to 10 Points
20 = 1 to 20 Points
30 = 1 to 30 Points

Distributed By: